# Product Specification

S-tech LED Lighting

**Track Light**

10w/15w/20w Ø65mm



## Product Features

- Wattage Adjustable (10w/15w/20w)
- 3 Colour Adjustable (3000K/4000K/5000K)
- CRI90
- Available in Black or White trim
- Adjustable Beam Angle 24°/60° (Beam Select)
- 160 x 214 x 65mm
- Suits 4 Wire, 3 Circuit Track
- IP20 protection
- UGR<19 (10w/24°)
- Weight: 520g


3 YEAR WARRANTY

## Specification Overview



COLOUR SELECT


WATT SELECT



BEAM SELECT

DIMMABLE

FLICKER-FREE LIGHTING

| Model | Power | Size | Colour Temp | Lumens | Beam Angle | Trim Colour | Power Requirement |
|---|---|---|---|---|---|---|---|
| TL-2065-3C-B | 10/15/20w | 160 x 214 x 65mm | 3000K/4000K/5000K | 775~2185lm | 24~60° | Black | 220~240VAC |
| TL-2065-3C-W | 10/15/20w | 160 x 214 x 65mm | 3000K/4000K/5000K | 775~2185lm | 24~60° | White | 220~240VAC |

# Product Specification

S-tech LED Lighting

Switch to Excellence

## Track Light


10w/15w/20w Ø65mm

| Model | Power | Beam Angle | Lumens | CCT | Dimension | Weight |
|---|---|---|---|---|---|---|
| TL-2065-3C-B | 10w<br>15w<br>20w | 24° | 775~845lm<br>1215~1535lm<br>1495~1790lm | 3000K/4000K/5000K | 160 x 214 x 65mm | 520g |
| TL-2065-3C-B | 10w<br>15w<br>20w | 60° | 785~860<br>1245~1560<br>1525~1880 | 3000K/4000K/5000K | 160 x 214 x 65mm | 520g |

| Model | Power | Beam Angle | Lumens | CCT | Dimension | Weight |
|---|---|---|---|---|---|---|
| TL-2065-3C-W | 10w<br>15w<br>20w | 24° | 900~980lm<br>1410~1780lm<br>1735~2080lm | 3000K/4000K/5000K | 160 x 214 x 65mm | 520g |
| TL-2065-3C-W | 10w<br>15w<br>20w | 60° | 910~995<br>1440~1810<br>1775~2185 | 3000K/4000K/5000K | 160 x 214 x 65mm | 520g |

| Specification | | | |
|---|---|---|---|
| CCT | 3000K/4000K/5000K | Housing | Aluminium |
| Efficacy | >77lm/w | Lens | Polycarbonate |
| CRI (%) | ≥90 | Housing Colour | Black or White options |
| Beam Angle | 24°~60° | Lifespan | >50,000 hours |
| Power Input | 220~240VAC | Operation Temperature | -20 °C to +35°C |
| Dimmable | Yes, (with LED, Universal or Trailing Edge Dimmers) | Glare Rating | 10w: UGR<19 (angle 24°)<br>15w: UGR<22 (angle 24°)<br>20w: UGR<22 (angle 24°) |
| Impact Rating | IK03 | | |
| Protection Rating | IP20 | Warranty | 3 Years |

**Dimensions**

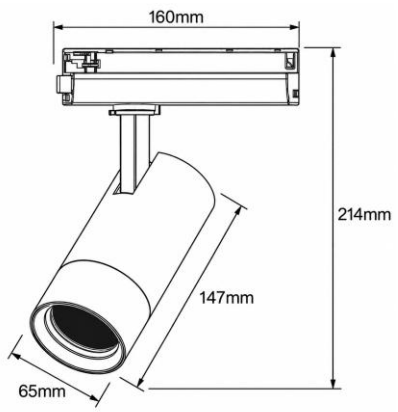



Specifications are subject to change without notice

# Track Light
## Accessories




### 3-Circuit Track

| Model | Trim Colour | Length |
|---|---|---|
| TL-A0410-B | Black | 1m |
| TL-A0410-W | White | 1m |
| TL-A0420-B | Black | 2m |
| TL-A0420-W | White | 2m |

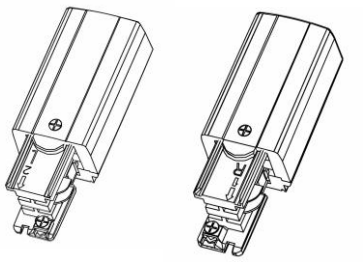

### Live-end Connector

| Model | Trim Colour | Type |
|---|---|---|
| TL-A0431L-B | Black | Left |
| TL-A0431L-W | White | Left |
| TL-A0431R-B | Black | Right |
| TL-A0431R-W | White | Right |



### End cap connects to the track section end

| Model | Trim Colour |
|---|---|
| TL-A0432-B | Black |
| TL-A0432-W | White |



### Mini Joiner

| Model | Trim Colour |
|---|---|
| TL-A0433-B | Black |
| TL-A0433-W | White |



### Straight Connector


| Model | Trim Colour |
|---|---|
| TL-A0434-B | Black |
| TL-A0434-W | White |



### Twisted L Connector


| Model | Trim Colour |
|---|---|
| TL-A0435-B | Black |
| TL-A0435-W | White |

# Track Light
## Accessories




### Reversing L Connector

| Model | Trim Colour |
|---|---|
| TL-A0438-B | Black |
| TL-A0438-W | White |




### Reversing T Connector

| Model | Trim Colour | Type |
|---|---|---|
| TL-A0436L-B | Black | Left |
| TL-A0436L-W | White | Left |
| TL-A0436R-B | Black | Right |
| TL-A0436R-W | White | Right |




### X Connector

| Model | Trim Colour |
|---|---|
| TL-A0437-B | Black |
| TL-A0437-W | White |



### EZclik Suspension Kit

| Model | Trim Colour | Length |
|---|---|---|
| TL-A0448-B | Black | 1.5m wire |
| TL-A0448-W | White | 1.5m wire |
| TL-A0447-B | Black | 1m rod |
| TL-A0447-W | White | 1m rod |



### EZclik Mounting Kit

| Model | Trim Colour |
|---|---|
| TL-A0146-B | Black |
| TL-A0146-W | White |