

Product Specification




Indoor Wall Light
2w STEP Light



Product Features

- 2w
- 3 Colour Adjustable (3000K, 4000K, 5000K)
- Portrait or Landscape orientation
- With or without motion sensor
- Fits a standard Australian wall box or plasterboard C-Clip
- Double insulated, Polycarbonate housing
- Flicker free
- 110 x 72 x 42mm (landscape), 72 x 110 x 42mm (portrait)
- IP44 Housing
- IK03 Impact Rating
- Weight: 105g


Options:



Black Trims



Specification Overview



SENSOR OPTION




Model	Power	Input	Colour Temp	Lumens	Beam Angle	Trim Colour	Dimensions
STEP-L-W	2w	220~240VAC	3000K/4000K/5000K	951lm	105 x 75°	White	110 x 72 x 42mm
STEP-L-S-W	 2w	220~240VAC	3000K/4000K/5000K	82lm	105 x 75°	White	110 x 72 x 45mm
STEP-P-W	2w	220~240VAC	3000K/4000K/5000K	80lm	105 x 75°	White	72 x 110 x 42mm
STEP-P-S-W	 2w	220~240VAC	3000K/4000K/5000K	80lm	105 x 75°	White	72 x 110 x 45mm

Indoor Wall Light

2w STEP - Landscape

Model	Trim Colour	Power	Lumens	CCT	Dimension	Weight
STEP-L-W	White	2w	95~115lm	3000K/4000K/5000K	110 x 72 x 42mm	102g
STEP-L-S-S	 White	2w	85~95lm	3000K/4000K/5000K	110 x 72 x 45mm	105g

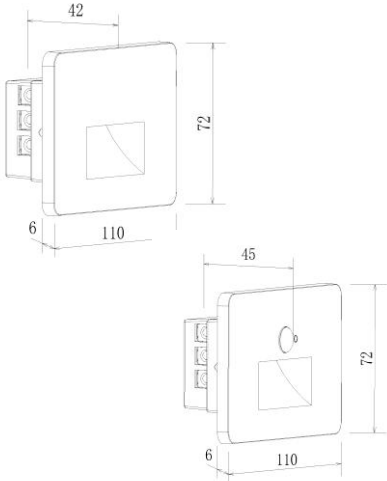Specification				Dimensions	
CCT	3000K/4000K/5000K	Housing	Polycarbonate		
Efficacy	>47lm/w	Diffuser	Polycarbonate		
CRI (%)	≥80	Housing Colour	White		
Beam Angle	105° x 75°	Lifespan	>50,000 hours		
Power Input	220~240VAC, Flicker Free	Operation Temperature	-20 °C to +45°C		
Dimmable	No				
Impact Rating	IK03				
Protection Rating	IP20 (rear) IP44 (front)	Warranty	3 Years		

Options







Black Trim

Model: STEP-LC-B

Black Trim

Model: STEP-LC-S-B





Sensor type	PIR
Detection Angle	90°
Area	1~3m
Hold Time	30 seconds
Daylight Sensor	Ambient Light < 15 Lux

Specifications are subject to change without notice

Indoor Wall Light
2w STEP - Portrait

Model	Trim Colour	Power	Lumens	CCT	Dimension	Weight
STEP-P-W	White	2w	80~95lm	3000K/4000K/5000K	72 x 110 x 42mm	102g
STEP-P-S-W	 White	2w	80~95lm	3000K/4000K/5000K	72 x 110 x 45mm	105g

Specification				Dimensions	
CCT	3000K/4000K/5000K	Housing	Polycarbonate		
Efficacy	>47lm/w	Diffuser	Polycarbonate		
CRI (%)	≥80	Housing Colour	White		
Beam Angle	105° x 75°	Lifespan	>50,000 hours		
Power Input	220~240VAC, Flicker Free	Operation Temperature	-20 °C to +45°C		
Dimmable	No				
Impact Rating	IK03				
Protection Rating	IP20 (rear) IP44 (front)	Warranty	3 Years		



Options


Sensor




Black Trim
Model: STEP-PC-B



Black Trim
Model: STEP-PC-S-B





Sensor type	PIR
Detection Angle	90°
Area	1~3m
Hold Time	30 seconds
Daylight Sensor	Ambient Light < 15 Lux

Specifications are subject to change without notice