

Product Specification

-tech
LED Lighting

Apollo Wall Pack
30w/35w/45w/50w Watt Select



30w/35w/45w/50w Watt Select



- Wattage Adjustable (30w/35w/45w/50w)
- 3 Colour Adjustable (3000K/4000K/5000K)
- Flicker Free Driver
- Aluminium Die Cast Housing
- UV Stabilised Opal Polycarbonate Lens
- 120° Beam Angle
- IP65 Housing
- IK10 Impact Rating
- Weight: 3.05kg



Dusk-to-dawn
Sensor



**FLICKER-FREE
LIGHTING**

**FLICKER-FREE
LIGHTING**



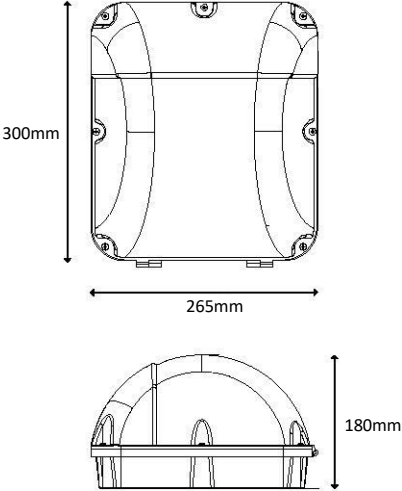
Model	Power	Input	Colour Temp	Lumens	Beam Angle	Trim Colour	Dimensions
WL-WP50-3C	30/35/45/50w	185~265VAC	3000K/4000K/5000K	3150~5460lm	120°	Black	265x300x180mm
WL-WP-MMS	Microwave Sensor Kit (3-Step ON-DIM-OFF) – Requires Remote for set-up						
WL-WP-RC	RF Remote Control (simplified) to suit WL-WP-MMS or WP70 Titan Wall Packs						
SMD-MR-REMOTE	RF Remote Control (complex) to suit WL-WP-MMS, WP70 Titan Wall Packs and SMD-MR G2 Sensor Battens						
WL-BH-PE	PE Cell kit for dusk-to-dawn switching – compatible with WP50, BH16, BH20, BH30 & BHPC wall light models only						

Apollo Wall Pack

30w/35w/45w/50w Watt Select

Model	Power	Lumens (30w)	CCT	Dimension (W x H x D)	Weight
-------	-------	-----------------	-----	--------------------------	--------

WL-WP50-3C	30w/35w/45w/50w	3150~5460lm	3000K/4000K/5000K	265 x 300 x 180mm	3.05kg
------------	-----------------	-------------	-------------------	-------------------	--------

Specification				Dimensions	
CCT	3000K/4000K/5000K (selectable)	Housing	Aluminium		
Efficacy	>105lm/w	Lens	Polycarbonate		
CRI (%)	≥80	Housing Colour	Black		
Beam Angle	120°	Lifespan	>40,000 hours		
Power Input	185~265VAC	Operation Temperature	-25 °C to +40°C		
Dimmable	No	Motion Sensor	Optional		
Impact Rating	IK10	PE Cell	Optional		
Protection Rating	IP65	Warranty	5 Years		

Options				
	WL-WP-MMS Microwave Sensor Kit (3-step ON-DIM-OFF) <i>*requires remote for set-up</i>		WL-WP-RC Simplified Remote Control to suit WL-WP-MMS	
	WL-BH-PE PE cell kit for dusk-to-dawn switching			