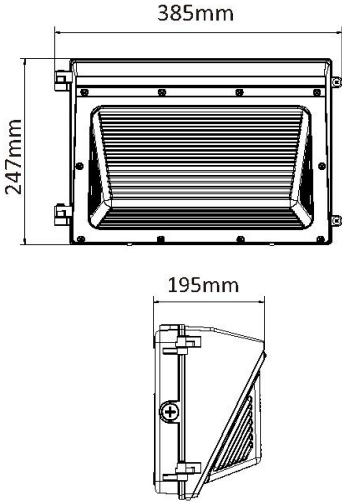


Apollo Wall Pack
30w/35w/45w/50w Watt Select

Switch to Excellence

Model	Power	Lumens	CCT	Dimension (W x H x D)	Weight
-------	-------	--------	-----	--------------------------	--------

WL-WP70-3C	70w/120w	7350~12600lm	3000K/4000K/5000K	385 x 247 x 195mm	4.52kg
------------	----------	--------------	-------------------	-------------------	--------

Specification				Dimensions
CCT	3000K/4000K/5000K (selectable)	Housing	Aluminium	
Efficacy	>105lm/w	Lens	Polycarbonate	
CRI (%)	≥80	Housing Colour	Bronze	
Beam Angle	120°	Lifespan	>40,000 hours	
Power Input	185~265VAC	Operation Temperature	-25 °C to +40°C	
Dimmable	No	Motion Sensor	Yes, integral	
Impact Rating	IK10			
Protection Rating	IP65	Warranty	5 Years	

Options



WL-WP-RC
Simplified Remote
Control to suit
WL-WP-MMS



SMD-MR-REMOTE
Complex Remote
Control to suit
WL-WP-MMS