

# Product Specification



## Titan Wall Pack 70w/120w Watt Select



### Product Features

- Wattage Adjustable (70w/120w)
- 3 Colour Adjustable (3000K/4000K/5000K)
- Built-in Microwave Sensor (can be de-activated)
- Flicker Free Driver
- Aluminium Die Cast Housing
- UV Stabilised Polycarbonate Lens
- 120° Beam Angle
- IP65 Housing
- IK10 Impact Rating
- Weight: 4.52kg

Options:



Remote Control for Sensor set-up

### Specification Overview



COLOUR SELECT



WATT SELECT



SENSOR



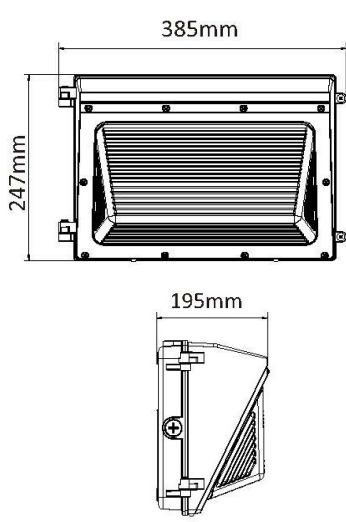
FLICKER-FREE LIGHTING



| Model         | Power   | Input      | Colour Temp       | Lumens       | Beam Angle | Trim Colour | Dimensions    |
|---------------|---|------------|-------------------|--------------|------------|-------------|---------------|
| WL-WP70-3C    | 70/120w   | 185~265VAC | 3000K/4000K/5000K | 7350~12600lm | 120°       | Bronze      | 385x247x195mm |
| WL-WP-RC      | RF Remote Control (simplified) to suit WL-WP-MMS or WP70 Titan Wall Packs                         |            |                   |              |            |             |               |
| SMD-MR-REMOTE | RF Remote Control (complex) to suit WL-WP-MMS, WP70 Titan Wall Packs and SMD-MR G2 Sensor Batters |            |                   |              |            |             |               |

## Titan Wall Pack 70w/120w Watt Select

| Model      | Power    | Lumens       | CCT               | Dimension (W x H x D) | Weight |
|------------|----------|--------------|-------------------|-----------------------|--------|
| WL-WP70-3C | 70w/120w | 7350~12600lm | 3000K/4000K/5000K | 385 x 247 x 195mm     | 4.52kg |

| Specification     |                                |                       |                 | Dimensions  |
|-------------------|--------------------------------|-----------------------|-----------------|---|
| CCT               | 3000K/4000K/5000K (selectable) | Housing               | Aluminium       |  |
| Efficacy          | >105lm/w                       | Lens                  | Polycarbonate   |   |
| CRI (%)           | ≥80                            | Housing Colour        | Bronze          |   |
| Beam Angle        | 120°                           | Lifespan              | >40,000 hours   |   |
| Power Input       | 185~265VAC                     | Operation Temperature | -25 °C to +40°C |   |
| Dimmable          | No                             | Motion Sensor         | Yes, integral   |   |
| Impact Rating     | IK10                           |                       |                 |   |
| Protection Rating | IP65                           | Warranty              | 5 Years         |   |

### Options



**WL-WP-RC**  
Simplified Remote  
Control to suit  
WL-WP-MMS



**SMD-MR-REMOTE**  
Complex Remote  
Control to suit  
WL-WP-MMS