



## 20w LED Bunker Light

### Product Features

- 20w
- 3 colours in one: 3000K, 4000K, 5000K (switch select)
- Available in black or white housing
- 120° Beam Angle
- Aluminium die cast housing
- Polycarbonate face
- Ø275 x 80mm
- IP65 Housing
- IK10 Impact Rating
- Weight: 1.25kg



#### Options:



Eyelid or  
Grille Cover



Emergency  
Fitting



Microwave  
Sensor



Dusk-to-dawn  
sensor

**3 Colour Adjustable**

### Specification Overview



Vandal Resistance  
**IK10**




| Model        | Power | Power Requirement | Colour Temp       | Lumens      | Beam Angle | Trim Colour | Dimensions |
|--------------|-------|-------------------|-------------------|-------------|------------|-------------|------------|
| WL-BH20-3C-B | 20w   | 220~240VAC        | 3000K/4000K/5000K | 1800~2000lm | 120°       | Black       | Ø275x80mm  |
| WL-BH20-3C-W | 20w   | 220~240VAC        | 3000K/4000K/5000K | 1800~2000lm | 120°       | White       | Ø275x80mm  |

# Product Specification



## 20w LED Bunker Light



### Options:



#### Eyelid Cover

Model: WL-BH20-ELC-B  
Model: WL-BH20-ELC-W  
(B) Black (W) White



#### Grille Cover

Model: WL-BH20-GC-B  
Model: WL-BH20-GC-W  
(B) Black (W) White



#### Microwave Sensor

Add in sensor option  
Model: WL-BH-MMS2




#### Photocell

Add in sensor option  
Turns on at dusk and off and dawn  
Model: WL-BH-PE



#### Emergency Fitting

Model: WL-BH20-3C-B-E  
Model: WL-BH20-3C-W-E  
(B) Black (W) White

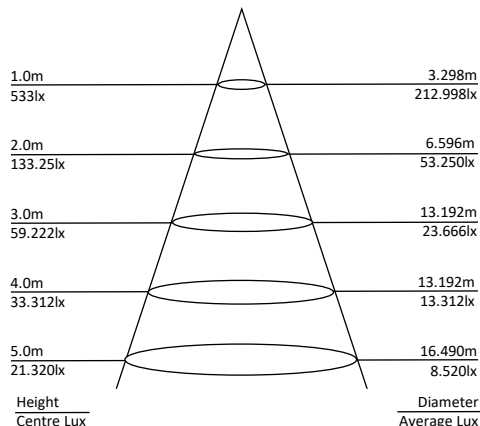

### Specification

|                           |                                    |         |              |
|---------------------------|------------------------------------|---------|--------------|
| Model                     | WL-BH20-3C-B                       |         | WL-BH20-3C-W |
| Trim Colour               | Black                              |         | White        |
| Colour Temperature (3CCT) | 3000K                              | 4000K   | 5000K        |
| Lumen (lm)                | 1513lm                             | 1879lm  | 1896lm       |
| Efficiency (lm/w)         | >73lm/w                            | >98lm/w | >91lm/w      |
| Light Source              | LED                                |         |              |
| CRI (%)                   | ≥80                                |         |              |
| Beam Angle                | 120°                               |         |              |
| Power Requirement         | 220~240VAC                         |         |              |
| Power Consumption         | 20.6w                              | 19.1w   | 20.8w        |
| Dimmable                  | No                                 |         |              |
| Housing                   | Diecast aluminium with PC diffuser |         |              |
| Lifespan                  | >40,000 hours                      |         |              |
| Operation Temperature     | -20°C~+45°C                        |         |              |
| Product Dimension         | Ø275 x 80mm                        |         |              |
| Impact Rating             | IK10                               |         |              |
| Weight                    | 1.25kg                             |         |              |
| Protection Rating         | IP65                               |         |              |
| Warranty                  | 5 Years                            |         |              |

Specifications are subject to change without notice