



## 12w LED Panel Down Light


### Product Features

- 12w
- 3 colours in one: 3000K, 4000K, 5000K (switch select)
- 110° Beam Angle
- Ø108 x 38mm
- 90mm cut-out
- Flex cable and plug included
- Weight: 350g



2-Core cable between driver and light

Options:




Brushed Chrome

**3 Colour Adjustable**



### Specification Overview




**IP44**

Model	Power	Power Requirement	Colour Temp	Lumens	Beam Angle	Trim Colour	Dimensions
PDL-1290-3C-WHT	12w	220~240VAC	3000-4000-5000K	950~1050lm	110°	White	Ø108 x 38mm
PDL-1290-3C-BC	12w	220~240VAC	3000-4000-5000K	950~1050lm	110°	B/ Chrome	Ø108 x 38mm

# Product Specification



## 12w LED Panel Down Light

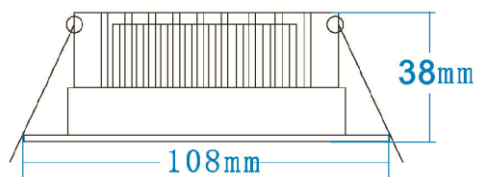

### Specification

Model	PDL-1290-3C-WHT	PDL-1290-3C-BC
Trim Colour	White	Brushed Chrome
Colour Temperature	3CCT: 3000K / 4000K / 5000K	
Lumen (lm)	950~1050lm	
Efficiency (lm/w)	>80 lm/w	
Light Source	LED	
CRI (%)	≥80	
Beam Angle	110°	
Power Requirement	220~240VAC	
Power Consumption	12w	
Dimmable	Yes, Triac dimmable	
Housing	Aluminium	
Lifespan	>50,000 hours	
Operation Temperature	-20°C~+45°C	
Product Dimension	Ø108 x 38mm	
Cut-Out	90mm	
Weight	350g	
Protection Rating	IP44	
Warranty	5 Years	

Specifications are subject to change without notice