




10w LED Bunker Light

Product Features

- 10w
- 3 colours in one: 3000K, 4000K, 5000K (switch select)
- 120° Beam Angle
- Aluminium die cast housing
- Polycarbonate face
- 215 x 135 x 50mm
- IP65 Housing
- IK10 Impact Rating
- Weight: 500g



Options:



Eyelid Cover

Grille Cover

3 Colour Adjustable



Specification Overview



Vandal Resistance
IK10




| Model | Power | Power Requirement | Colour Temp | Lumens | Beam Angle | Trim Colour | Dimensions |
|--------------|-------|-------------------|-------------------|------------|------------|-------------|--------------|
| WL-BH10-3C-B | 10w | 220~240VAC | 3000K/4000K/5000K | 900~1000lm | 120° | Black | 215x135x50mm |
| WL-BH10-3C-W | 10w | 220~240VAC | 3000K/4000K/5000K | 900~1000lm | 120° | White | 215x135x50mm |

Product Specification



10w LED Bunker Light

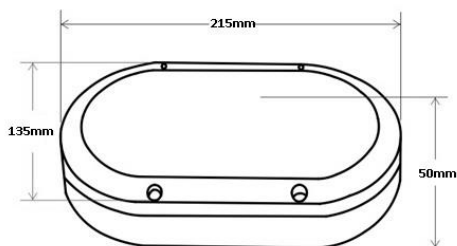


Options:



Eyelid Cover
 Model: WL-BH10-ELC-B
 Model: WL-BH10-ELC-W
 (B) Black (W) White



Grille Cover
 Model: WL-BH10-GC-B
 Model: WL-BH10-GC-W
 (B) Black (W) White

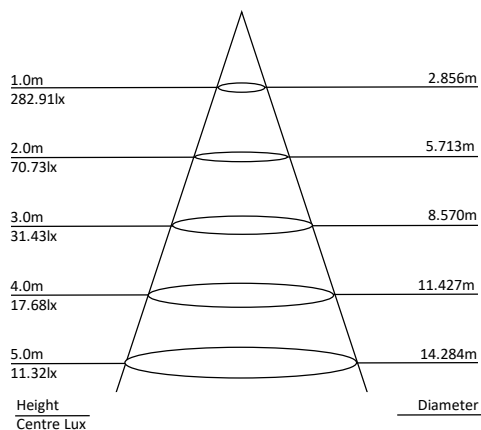

Specification

| Model | WL-BH10-3C-B | WL-BH10-3C-W | |
|---------------------------|------------------------------------|--------------|---------|
| Trim Colour | Black | White | |
| Colour Temperature (3CCT) | 3000K | 4000K | 5000K |
| Lumen (lm) | 900lm | 1000lm | 970lm |
| Efficiency (lm/w) | >90lm/w | >100lm/w | >97lm/w |
| Light Source | LED | | |
| CRI (%) | ≥80 | | |
| Beam Angle | 120° | | |
| Power Requirement | 220~240VAC | | |
| Power Consumption | 10w | | |
| Dimmable | No | | |
| Housing | Diecast aluminium with PC diffuser | | |
| Lifespan | >40,000 hours | | |
| Operation Temperature | -20°C~+45°C | | |
| Product Dimension | 215 x 135 x 50mm | | |
| Impact Rating | IK10 | | |
| Weight | 500g | | |
| Protection Rating | IP65 | | |
| Warranty | 5 Years | | |

Specifications are subject to change without notice