


LED Surface Mount Diffused Batten – 40W – Microwave Sensor type

Model: SMD-4FT-40-3C-MR

S-tech's Integrated LED surface mount fittings are a complete fitting replacement for existing T8 or T5 installations, or perfect for new installations looking for a complete LED solution in a single fitting. The fitting is complete with a 3-step microwave motion sensor that will activate when there is movement, then can dim to a set level and eventually turn off after a set time. The control is fully flexible using the optional remote controller.

Product Features

- Only consumes 40w of power
- 3 colour adjustable (switch select)
- Inbuilt Microwave Sensor with 3-step dimming function (on-dim-off)
- Automatic switching and dimming based on motion and light levels
- 120° beam angle
- Opal Diffuser
- Available in Standard, Emergency or Emergency/Microwave Sensor option
- 5 Year Warranty

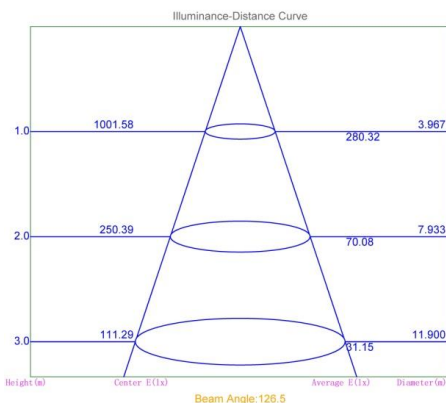


Options:

RF Remote Control for microwave sensor setting



Model: WP-MS-REMOTE

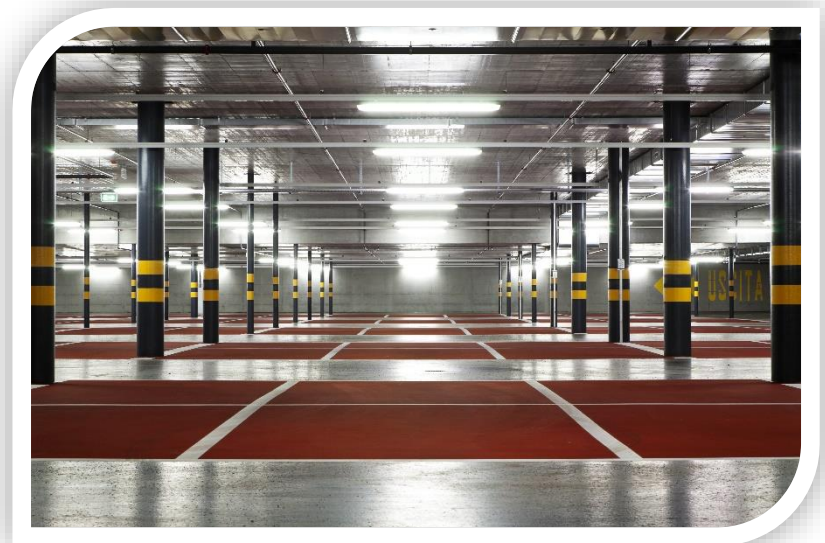

SPECIFICATION

Colour	Warm White (3000K)	Neutral White (4000K)	Cool White (5000K)
Lumen (lm)	4600~5000		
Efficiency (Lm/w)	>115Lm/w		
Light Source	SMD LED		
Beam Angle	120°		
Power Requirement	AC 220~240V		
Power Consumption	40w		
Dimmable	Yes by microwave sensor setting		
Housing	PC Opal Diffuser and Aluminium Base		
Lifespan	> 40,000 hours		
Operation Temperature	-20°C~+45°C		
Dimension (mm)	1203 (L) x 85 (W) x 65 (H)		
Protection Rating	IP44 (front)		
Warranty	5 Years		

Specifications are subject to change without notice. Version: January 2019