




## 200w V18 WATT SELECT Premium LED High Bay Light

### Product Features

- 200w-150w-120w-100w (Watt Select)
- Quality 0-10V Dimmable Driver
- DALI compatible (with optional converter)
- Full range power input 90~305VAC
- Aluminium die cast housing
- Polycarbonate Lens
- 120° Beam Angle (others optional)
- Supplied with 2.4m flex and plug
- Ø350 x 210mm
- IP65 Housing
- Weight: 5.7kg



Options:

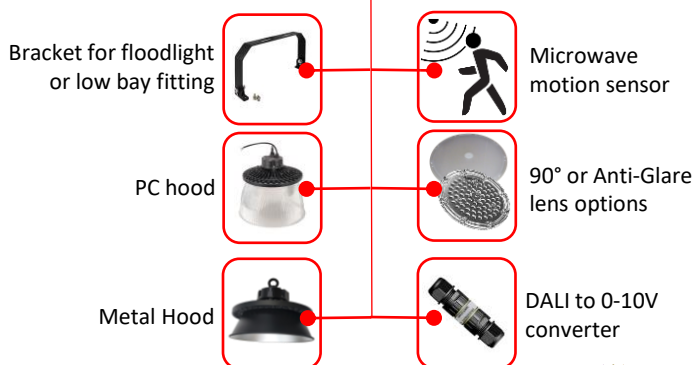

### Specification Overview




Model	Power	Power Requirement	Colour Temp	Lumens	Beam Angle	Trim Colour	Dimensions
HB-V18WS-V	100-120-150-200w	90~305VAC	5000K	18,061~31,756lm	120°	Black	Ø350x210mm

# Product Specification



## 200w V18S UFO LED High Bay Light



### Lens Options



90° Lens for 100-150-200w High Bay  
Model: FLA-SHV18S-1-L90



Anti-Glare Lens for 100-150-200w High Bay  
Model: FLA-SHV18S-1-LMW

### Reflector Hood Options



120° Reflector Hood for 100-150-200w High Bay  
Model: FLA-SHV18S-1-MRHB



PC Reflector Hood for 100-150-200w High Bay  
Model: FLA-SHV18S-1-PRH

### Other Accessories



Bracket to suit 100-150-200w High Bay  
Model: FLA-SHV18S-1-FB




Merrytek Microwave Motion Sensor Kit  
Model: FLA-SHV18S-1-MMS



DALI to 0-10V Converter  
Model: HB-SCD010B

200w Model

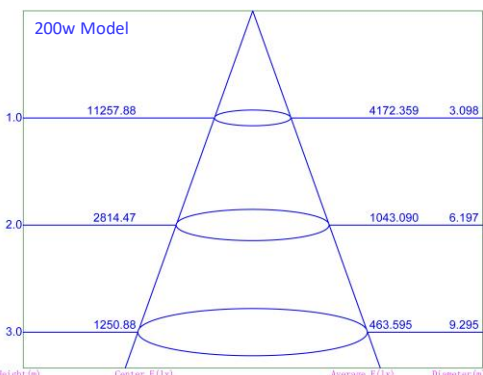

### Specification

Model	HB-WS200-V			
Colour Temperature	5000K			
Lumen (lm)	18061lm	20468lm	24341lm	31756lm
Efficiency (lm/w)	>180lm/w	>170lm/w	>151lm/w	>151lm/w
Light Source	LED			
CRI (%)	≥80			
Beam Angle	120° (90° optional)			
Power Requirement	100~305VAC			
Power Consumption	100w	120w	150w	200w
Dimmable	Yes, 0-10V. DALI with optional converter			
Housing	Diecast aluminium with Polycarbonate lens cover			
Lifespan	>50,000 hours			
Operation Temperature	-40°C~+60°C			
Product Dimension	Ø350 x 210mm			
Impact Rating	IK10			
Weight	5.7kg			
Protection Rating	IP65			
Warranty	5 Years			

Specifications are subject to change without notice