



100w V19E Slimline LED Flood Light

Product Features

- 100w
- Quality Driver
- Full range power input 90~305VAC
- Aluminium die cast housing
- Tempered glass face
- 120° Beam Angle
- 394 x 394 x 56mm
- IP66 Housing
- Weight: 4.5kg




Specification Overview

| Model | Power | Power Requirement | Colour Temp | Lumens | Beam Angle | Trim Colour | Dimensions |
|-----------------|-------|-------------------|-------------|----------|------------|-------------|--------------|
| FLA-SC100W-V19E | 100w | 90~305VAC | 5000K | 12,860lm | 120° | Black | 394x394x56mm |

Product Specification




100w V19E Slimline LED Flood Light

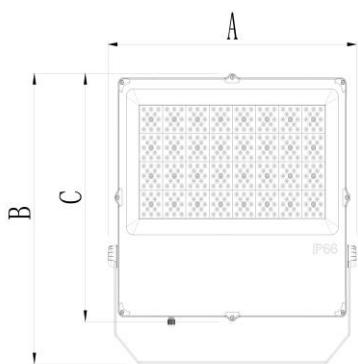

Specification

| | |
|---------------------------|---|
| Model | FLA-SC100W-V19E |
| Colour Temperature (1CCT) | 5000K |
| Lumen (lm) | 12,860lm |
| Efficiency (lm/w) | >125lm/w |
| Light Source | LED |
| CRI (%) | ≥80 |
| Beam Angle | 120° |
| Power Requirement | 90~305VAC |
| Power Consumption | 102.2w |
| Dimmable | No |
| Housing | Diecast aluminium with toughened glass lens |
| Lifespan | >50,000 hours |
| Operation Temperature | -20°C~+45°C |
| Product Dimension | 394 x 394 x 56mm |
| Impact Rating | IK08 |
| Weight | 4.5kg |
| Protection Rating | IP66 |
| Warranty | 5 Years |

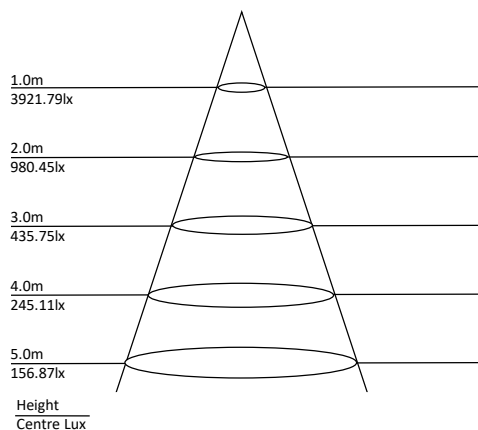

Specifications are subject to change without notice