



50w ECOSTREET LED Street Light

Product Features

- 50w
- Fits 50~60mm spigot size
- Quality Driver
- Full range power input 90~305VAC
- Aluminium die cast housing
- Polycarbonate face
- 150/70° Beam Angle
- 485 x 135 x 95mm
- IP66 Housing
- IK10 Impact Rating
- Weight: 2.1kg




Specification Overview

Model	Power	Power Requirement	Colour Temp	Lumens	Beam Angle	Trim Colour	Dimensions	Spigot Size
ECO-SL-50W-V	50w	90~305VAC	5000K	7277lm	150/70°	Dark Grey	485x135x95mm	50~60mm


Product Specification




50w ECOSTREET LED Street Light

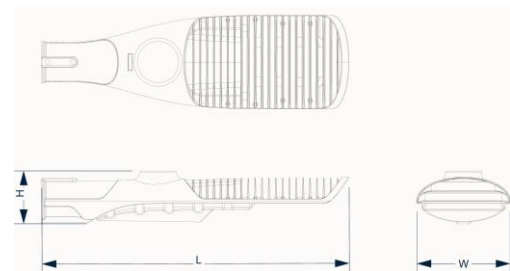

INTENSITY DISTRIBUTION DIAGRAM
IN C PLANS

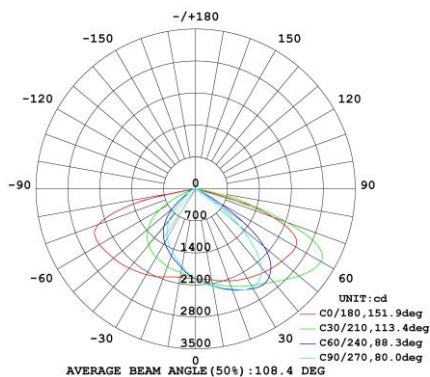

MAX INTENSITY CONE SURFACE
DISTRIBUTION DIAGRAM

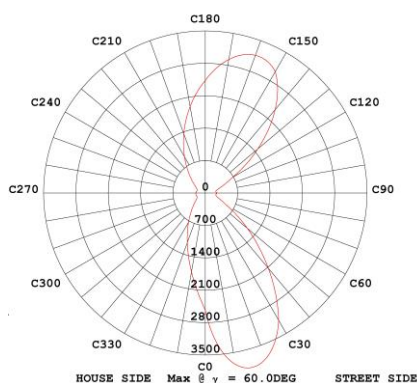

Specification

Model	ECO-SL-50W-V
Colour Temperature (1CCT)	5000K
Lumen (lm)	7277lm
Efficiency (lm/w)	>145lm/w
Light Source	LED
CRI (%)	≥80
Beam Angle	150° / 70°
Power Requirement	90~305VAC
Power Consumption	50.14w
Dimmable	No
Housing	Diecast aluminium with PC diffuser
Lifespan	>40,000 hours
Operation Temperature	-20°C~+45°C
Product Dimension	485 x 135 x 95mm
Impact Rating	IK10
Weight	2.1kg
Protection Rating	IP66
Warranty	3 Years

Specifications are subject to change without notice