



300 x 1200 T-Bar Backlit LED Panel Light - Low Glare

Product Features

- 36w
- Low Glare UGR<19
- 295 x 1195mm
- Backlit design ensuring long life and performance
- 3 colours in one: 3000K, 4000K, 5000K (switch select)
- 120° Beam Angle
- White Trim
- 295 x 1195 x 30mm
- IP20 Housing
- Optional Triac or Dali dimming drivers available
- Weight: 3.3g



Prismatic Diffused Lens

3 Colour Adjustable




Specification Overview

Model	Power	Power Requirement	Colour Temp	Lumens	Beam Angle	Trim Colour	Dimensions
PL-30120-33V4-UGR	36w	200~240VAC	3000-4000-5000K	3010~3412lm	120°	White	295x1195x30mm

Product Specification




300 x 1200 T-Bar Backlit LED Panel Light - Low Glare

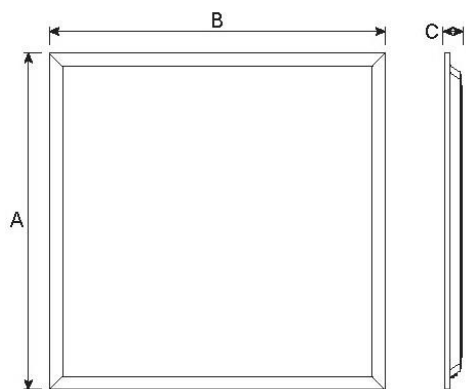

Specification

Model	PL-30120-33V4-UGR		
Colour Temperature (3CCT)	3000K	4000K	5000K
Lumen (lm)	3010lm	3412lm	3201lm
Efficiency (lm/w)	>81lm/w	>101lm/w	>88lm/w
Light Source	LED		
CRI (%)	≥80		
Beam Angle	120°		
Unified Glare Rating (UGR)	<19		
Power Requirement	200~240VAC		
Power Consumption	36.8w	33.7w	36.2w
Dimmable	NO (Optional dimming drivers available)		
Housing	Aluminium with PS lens		
Lifespan	>40,000 hours		
Operation Temperature	-20°C~+45°C		
Product Dimension	295 x 1195 x 30mm		
Weight	3.3kg		
Protection Rating	IP20		
Warranty	3 Years		

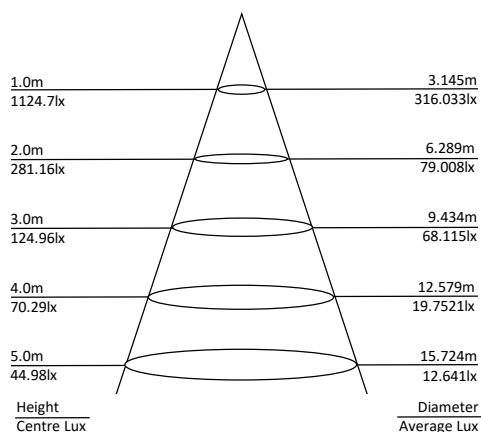

Specifications are subject to change without notice