




800w V19E Slimline LED Flood Light

Product Features

- 800w
- Quality Driver
- Full range power input 90~305VAC
- Aluminium die cast housing
- Tempered glass face
- 90° Beam Angle
- 503 x 1140 x 64mm
- IP66 Housing
- Weight: 23kg

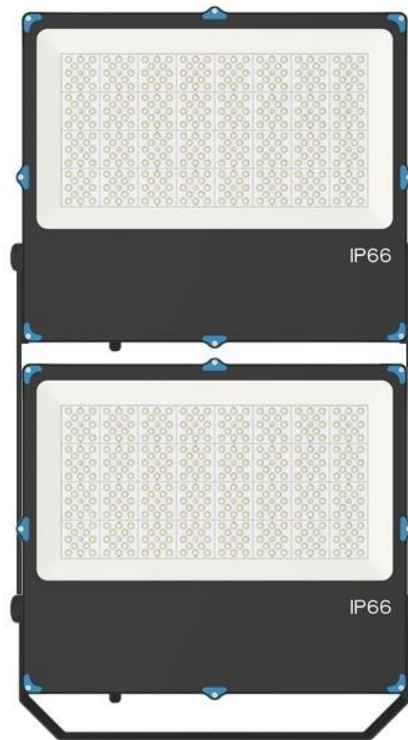

Specification Overview

| Model | Power | Power Requirement | Colour Temp | Lumens | Beam Angle | Trim Colour | Dimensions |
|---------------|-------|-------------------|-------------|----------|------------|-------------|---------------|
| FLA-SC800W-RV | 800w | 90~305VAC | 5000K | 93,924lm | 90° | Black | 503x1140x64mm |


Product Specification



800w V19E Slimline LED Flood Light

Specification

| | |
|---------------------------|---|
| Model | FLA-SC800W-RV |
| Colour Temperature (1CCT) | 5000K |
| Lumen (lm) | 93,924lm |
| Efficiency (lm/w) | >118lm/w |
| Light Source | LED |
| CRI (%) | ≥80 |
| Beam Angle | 90° |
| Power Requirement | 90~305VAC |
| Power Consumption | 793.6w |
| Dimmable | No |
| Housing | Diecast aluminium with toughened glass lens |
| Lifespan | >50,000 hours |
| Operation Temperature | -20°C~+45°C |
| Product Dimension | 503 x 1140 x 64mm |
| Impact Rating | IK08 |
| Weight | 23kg |
| Protection Rating | IP66 |
| Warranty | 5 Years |

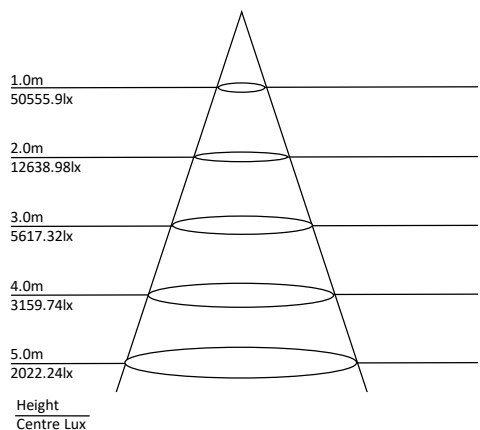

Specifications are subject to change without notice