



200w WATT SELECT UFO LED High Bay Light

Product Features

- 200w-150w-120w-100w (Watt Select)
- Quality 0-10V Dimmable Driver
- DALI compatible (with optional converter)
- Full range power input 100~305VAC
- Aluminium die cast housing
- Polycarbonate Lens
- 120° Beam Angle
- Supplied with 1.8m flex and plug
- Ø320 x 210mm
- IP65 Housing
- Weight: 4.6kg



WATT SELECT
LED HIGHBAY LIGHT

Options:

DALI to 0-10V
converter



Microwave
motion sensor

Anti-Glare Lens



Bracket for floodlight
or low bay fitting



Specification Overview




Model	Power	Power Requirement	Colour Temp	Lumens	Beam Angle	Trim Colour	Dimensions
HB-WS200-V	100-120-150-200w	100~305VAC	5000K	16,305~30,000lm	120°	Black	Ø320x210mm

Product Specification



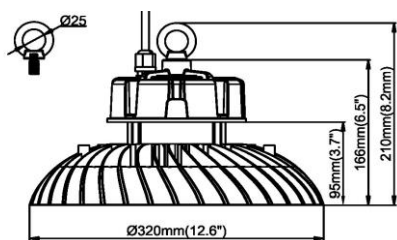

200w WATT SELECT UFO LED High Bay Light




Accessory options

 Merrytek Microwave Motion Sensor Kit
Model: FLA-SHV18S-1-MMS

 Bracket for floodlight or low bay fitting
Model: FLA-SHV18S-1-FB

 Anti-Glare Milky White Lens
Model: ECO-HB-LMW

 DALI to 0-10V Converter
Model: HB-SCD010B

Watt Select Settings


Default



200w



150w



120w



100w

Specification

Model	HB-WS200-V			
Colour Temperature	5000K			
Lumen (lm)	16305lm	18712lm	22585lm	30000lm
Efficiency (lm/w)	>162lm/w	>157lm/w	>151lm/w	>151lm/w
Light Source	LED			
CRI (%)	≥80			
Beam Angle	120°			
Power Requirement	100~305VAC			
Power Consumption	100w	120w	150w	200w
Dimmable	Yes, 0-10V. DALI with optional converter			
Housing	Diecast aluminium with Polycarbonate lens cover			
Lifespan	>50,000 hours			
Operation Temperature	-40°C~+50°C			
Product Dimension	Ø320 x 210mm			
Impact Rating	IK08			
Weight	4.6kg			
Protection Rating	IP65			
Warranty	5 Years			

Specifications are subject to change without notice


Product Specification




200w WATT SELECT UFO LED High Bay Light

Photometric Data


100w



120w



150w



200w

