


## 100w ECO-HB UFO LED High Bay Light

### Product Features

- 100w
- Quality 0-10V Dimmable Driver
- DALI compatible (with optional converter)
- Full range power input 100~305VAC
- Aluminium die cast housing
- Polycarbonate Lens
- 120° Beam Angle
- Supplied with 1.8m flex and plug
- Ø260 x 210mm
- IP65 Housing
- Weight: 4.4kg



Options:



DALI to 0-10V  
converter



Bracket for floodlight  
or low bay fitting



Anti-Glare Lens



### Specification Overview




Model	Power	Power Requirement	Colour Temp	Lumens	Beam Angle	Trim Colour	Dimensions
ECO-HB100W-V	100w	100~305VAC	5000K	15,215lm	120°	Black	Ø260x210mm

# Product Specification



## 100w ECO-HB UFO LED High Bay Light



### Accessory options



Bracket for floodlight or low bay fitting  
Model: ECO-HB100-FB



Anti-Glare Milky White Lens  
Model: ECO-HB100-LMW




DALI to 0-10V Converter  
Model: HB-SCD010B

### Specification

Model	ECO-HB100W-V
Colour Temperature (1CCT)	5000K
Lumen (lm)	15,215lm
Efficiency (lm/w)	>152lm/w
Light Source	LED
CRI (%)	≥80
Beam Angle	120°
Power Requirement	100~305VAC
Power Consumption	98.9w
Dimmable	Yes, 0-10V standard. DALI with optional converter
Housing	Diecast aluminium with Polycarbonate lens cover
Lifespan	>50,000 hours
Operation Temperature	-40°C~+50°C
Product Dimension	Ø260 x 200mm
Impact Rating	IK08
Weight	4.4kg
Protection Rating	IP65
Warranty	5 Years

Illuminance-Distance Curve

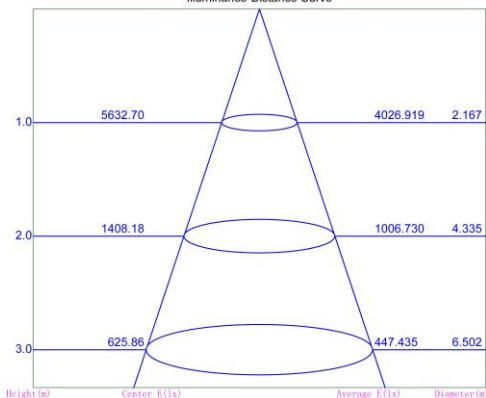

Specifications are subject to change without notice