



8w LED Down Light – Low Glare UGR

Product Features


- 8w
- 3 colours in one: 3000K, 4000K, 5000K (switch select)
- Low Glare Design
- White or Black Trim
- 60° Beam Angle
- Ø106 x 84mm
- 90mm cut-out
- IP54 (front only) protection
- 0.6m Flex cable and plug included
- Weight: 260g



3 Colour Adjustable



Specification Overview




IP54
(front only)

Model	Power	Power Requirement	Colour Temp	Lumens	Beam Angle	Trim Colour	Dimensions
DLU-0890-3C-W	8w	220~240VAC	3000-4000-5000K	600~800lm	60°	White	Ø106 x 84mm
DLU-0890-3C-B	8w	220~240VAC	3000-4000-5000K	600~800lm	60°	Black	Ø106 x 84mm

Product Specification



8w LED Panel Down Light – Low Glare UGR

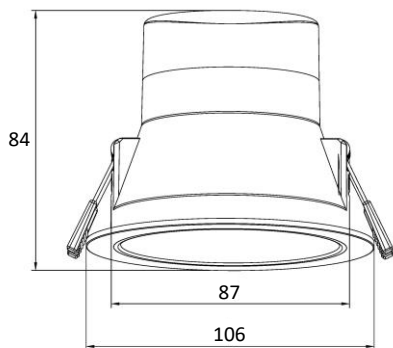

Specification

Model	DLU-0890-3C-W	DLU-0890-3C-B
Trim Colour	White	Black
Colour Temperature	3CCT: 3000K / 4000K / 5000K	
Lumen (lm)	600~800lm	
Efficiency (lm/w)	>75 lm/w	
Light Source	LED	
CRI (%)	≥80	
Beam Angle	60°	
UGR Rating	UGR<23	UGR<19
Power Requirement	220~240VAC	
Power Consumption	8w	
Dimmable	Yes, Triac dimmable	
Housing	Plastic coated aluminium	
Lifespan	>40,000 hours	
Operation Temperature	-20°C~+45°C	
Product Dimension	Ø106 x 84mm	
Cut-Out	90mm	
Weight	260g	
Protection Rating	IP54 (front) / IP40 (rear)	
Warranty	3 Years	

Specifications are subject to change without notice