



## 200w MultiFiT V3 LED Street Light

### Product Features

- 200w
- 2 Colour Adjustable (4000K/5000K)
- Fits 50~60mm spigot size
- Quality Driver
- Full range power input 90~305VAC
- 10KV surge protector
- Aluminium die cast housing
- Supports pole top (90° ±15°) or spigot mounting (0° ±15°)
- 150/80° Beam Angle
- PE cell compatible
- IP65 Housing
- IK08 Impact Rating
- Weight: 6.9kg



**2 Colour Adjustable**

Options:




PE Cell



Mounting Poles



Ø32-40mm Spigot Replacement



Outreach or Spigot Adaptors



Spigot mounting



Pole top mounting

### Specification Overview




| Model       | Power | Power Requirement | Colour Temp     | Lumens              | Beam Angle | Trim Colour | Dimensions    | Spigot Size |
|-------------|-------|-------------------|-----------------|---------------------|------------|-------------|---------------|-------------|
| SLM-200W-2C | 200w  | 90~305VAC         | 4000K/<br>5000K | 22206lm/<br>22116lm | 150/80°    | Black       | 693x300x109mm | 50~60mm     |

# Product Specification



## 200w MultiFiT V3 LED Street Light

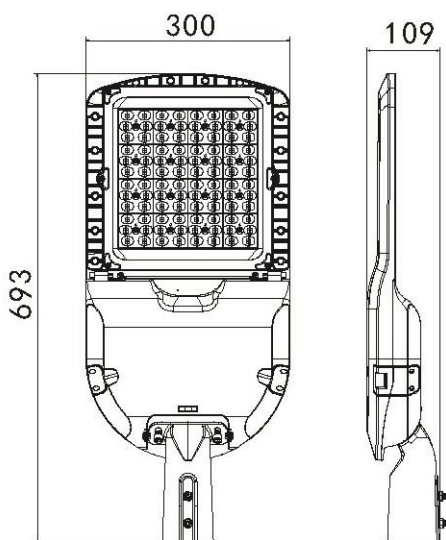

### Specification

|                           |  |          |
|---------------------------|--|----------|
| Model                     | SLM-200W-2C                                    |          |
| Colour Temperature (2CCT) | 4000K  | 5000K    |
| Lumen (lm)                | 22206lm  | 22116lm  |
| Efficiency (lm/w)         | >111lm/w                                       | >110lm/w |
| Light Source              | LED  |          |
| CRI (%)                   | ≥80  |          |
| Beam Angle                | 150° / 80°                                     |          |
| Power Requirement         | 90~305VAC                                      |          |
| Power Consumption         | 200w   |          |
| Dimmable                  | No   |          |
| Housing                   | Diecast aluminium with tempered glass diffuser |          |
| Lifespan                  | >40,000 hours                                  |          |
| Operation Temperature     | -30°C~+40°C                                    |          |
| Product Dimension         | 693 x 300 x 109mm (Spigot mount)               |          |
| Fits Spigot Size          | Ø50 ~ Ø60mm                                    |          |
| Impact Rating             | IK08   |          |
| Weight                    | 6.9kg  |          |
| Protection Rating         | IP65   |          |
| Warranty                  | 5 Years  |          |

#### Options:




PE Cell  
(Model: SLM-PE)



Mounting Poles



Ø32-40mm Spigot Replacement  
(Model: SLM-SPIGOT-40)



Outreach or Spigot Adaptors

Specifications are subject to change without notice