




4FT G3 WP Batten Series – Turtle Safe / Bug Free / Eyewash

Product Features


- 20w / 40w Dual Power Selectable
- 1200mm
- 2 colours in one: Amber (Turtle Friendly/Bug Free), Green (Eye wash)
- Ø20mm Conduit Entry
- 110° Beam Angle
- PC Base and Lens
- 1200 x 95 x 80mm
- IP65 Housing
- IK08 Impact Rating
- Weight: 1.28kg

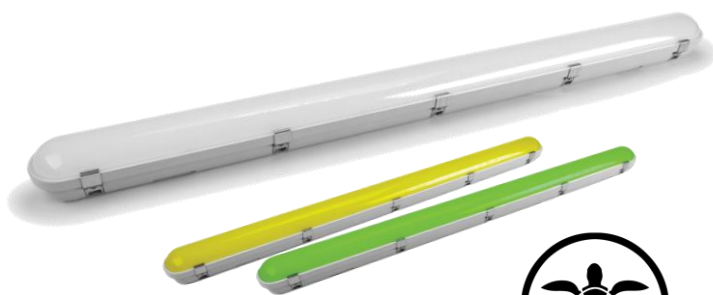

Options:



Standard



Emergency Fitting



TURTLE SAFE



BUG FREE



EYEWASH LIGHT



COLOUR SELECT



WATT SELECT



Specification Overview




Model	Power	Power Requirement	Colour Temp	Lumens	Beam Angle	Trim Colour	Dimensions
WP-4FTG3-TLG	20/40w	200~240VAC	Amber / Green	4000~4400lm	110°	Grey/Opal	1200x95x80mm
WP-4FTG3-TLG-E	20/40w	Emergency Version					

Product Specification



STD
OPERATION

4FT G3 WP Batten - Turtle Safe / Bug Free / Eyewash - Standard

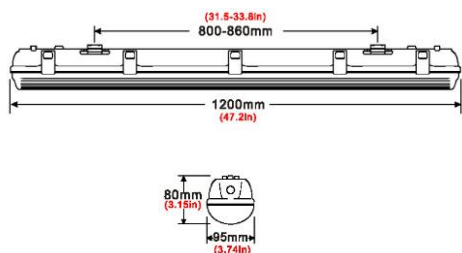

TURTLE SAFE



BUG FREE



EYEWASH LIGHT

Specification

Model	WP-4FTG3-TLG
Colour Temperature (2CCT)	Amber / Green (selectable)
Lumen (lm) @ 40w	4000 ~ 4400lm
Efficiency (lm/w)	>100 lm/w
Light Source	LED
CRI (%)	≥80
Beam Angle	110°
Power Requirement	200~240VAC
Power Consumption	20w / 40w Selectable
Dimmable	No
Housing	PC Base and Diffuser
Lifespan	>50,000 hours
Operation Temperature	-20°C~+50°C
Product Dimension	1200 x 95 x 80mm
Conduit Entry	Ø20mm
Impact Rating	IK08
Weight	1.28kg
Protection Rating	IP65
Warranty	3 Years

Specifications are subject to change without notice


Product Specification



4FT G3 WP Batten - Turtle Safe / Bug Free / Eyewash - Emergency

Product Features

- Maintained / Non-Maintained Emergency Fitting

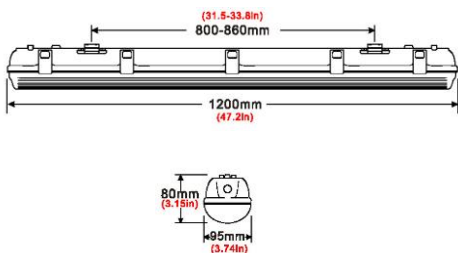

TURTLE SAFE



BUG FREE



EYEWASH LIGHT

Specification

Model	WP-4FTG3-TLG-E
Colour Temperature (2CCT)	Amber / Green (selectable)
Lumen (lm) @ 40w	4000 ~ 4400lm
Efficiency (lm/w)	>100 lm/w
Light Source	LED
CRI (%)	≥80
Beam Angle	110°
Power Requirement	200~240VAC
Power Consumption	20w / 40w Selectable
Emergency Power	5w
Emergency Run-Time	90 minutes
Emergency Classification	C0: D32, C90: D12.5
Housing	PC Base and Diffuser
Lifespan	>50,000 hours
Operation Temperature	-20°C~+50°C
Product Dimension	1200 x 95 x 80mm
Conduit Entry	Ø20mm
Impact Rating	IK08
Weight	1.28kg
Protection Rating	IP65
Warranty	3 Years

Specifications are subject to change without notice