



6w LED Down Light – Low Glare UGR

Product Features


- 6w
- 3 colours in one: 3000K, 4000K, 5000K (switch select)
- Low Glare Design
- White or Black Trim
- 60° Beam Angle
- Ø85 x 84mm
- 70mm cut-out
- IP54 (front only) protection
- 0.6m Flex cable and plug included
- Weight: 125g



3 Colour Adjustable



Specification Overview




IP54
(front only)

Model	Power	Power Requirement	Colour Temp	Lumens	Beam Angle	Trim Colour	Dimensions
DLU-0670-3C-W	6w	220~240VAC	3000-4000-5000K	500~700lm	60°	White	Ø85 x 84mm

Product Specification



6w LED Panel Down Light – Low Glare UGR

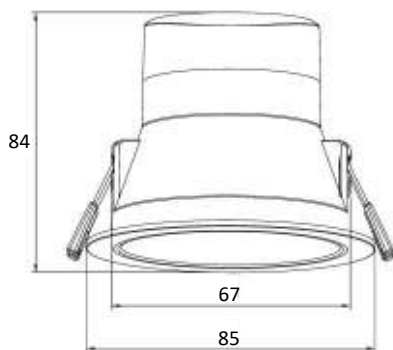

Specification

Model	DLU-0670-3C-W
Trim Colour	White
Colour Temperature	3CCT: 3000K / 4000K / 5000K
Lumen (lm)	500~700lm
Efficiency (lm/w)	>83 lm/w
Light Source	LED
CRI (%)	≥80
Beam Angle	60°
UGR Rating	UGR<23
Power Requirement	220~240VAC
Power Consumption	6w
Dimmable	Yes, Triac dimmable
Housing	Plastic coated aluminium
Lifespan	>40,000 hours
Operation Temperature	-20°C~+45°C
Product Dimension	Ø85 x 84mm
Cut-Out	70mm
Weight	125g
Protection Rating	IP54 (front) / IP40 (rear)
Warranty	3 Years

Specifications are subject to change without notice