



600w LED Stadium Flood Light

Product Features

- 600w
- Quality Driver
- Full range power input 90~305VAC
- Aluminium housing
- Polycarbonate lens face
- Choice of 15°, 30°, 40°x80°, 60° or 90°x135° Beam Angles
- 465 x 568 x 125mm
- IP66 Housing
- Weight: 20kg





Specification Overview

| Model | Power | Power Requirement | Colour Temp | Lumens | Beam Angle | Trim Colour | Dimensions |
|------------|-------|-------------------|-------------|---------|-------------|-------------|---------------|
| ST-SF-600W | 600w | 90~305VAC | 5000K | 92782lm | See options | Black | 465x568x125mm |

Product Specification



600w LED Stadium Flood Light

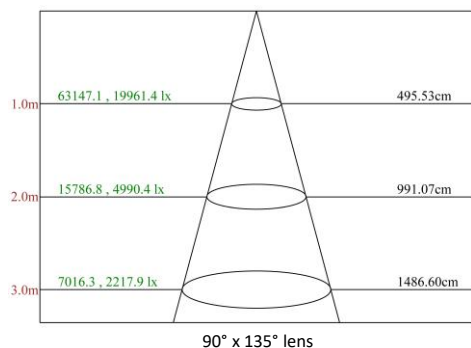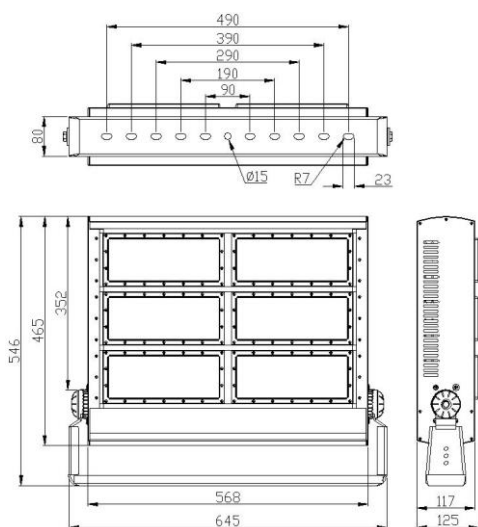

Specification

| | |
|---------------------------|------------------------------------|
| Model | ST-SF-600W |
| Colour Temperature (1CCT) | 5000K |
| Lumen (lm) | 92782lm |
| Efficiency (lm/w) | >153lm/w |
| Light Source | LED |
| CRI (%) | ≥80 |
| Beam Angle Options | 15°, 30°, 40°x80°, 60° or 90°x135° |
| Power Requirement | 90~305VAC |
| Power Consumption | 604.8w |
| Dimmable | Optional (Dali, DMX or 0-10V) |
| Housing | Aluminium with polycarbonate lens |
| Lifespan | >50,000 hours |
| Operation Temperature | -40°C~+50°C |
| Product Dimension | 465 x 568 x 125mm |
| Impact Rating | IK08 |
| Weight | 20kg |
| Protection Rating | IP66 |
| Warranty | 5 Years |

Specifications are subject to change without notice