



1000w V19E Slimline LED Flood Light

Product Features

- 1000w
- Quality Driver
- Full range power input 90~305VAC
- Aluminium die cast housing
- Tempered glass face
- 60° Round Beam Angle or 150x80° asymmetric (forward throw) Beam Angle available
- 672 x 1120 x 188mm
- IP66 Housing
- Weight: 33kg



Options:



Cut-off Hood

Image shown with optional cut-off hood fitted



Specification Overview



Model	Power	Power Requirement	Colour Temp	Lumens	Beam Angle	Trim Colour	Dimensions
FLA-SC1000W-RV	1000w	90~305VAC	5000K	112,218lm	60°	Black	672x1120x188mm
FLA-SC1000W-AV	1000w	90~305VAC	5000K	111,862lm	150°x80°	Black	672x1120x188mm

Product Specification




1000w V19E Slimline LED Flood Light




Optional cut-off hood
(Model: FLA-SC500-CH)

Lens Options:


Round Beam



Asymmetric Forward Throw



60° Round Beam (500w only)

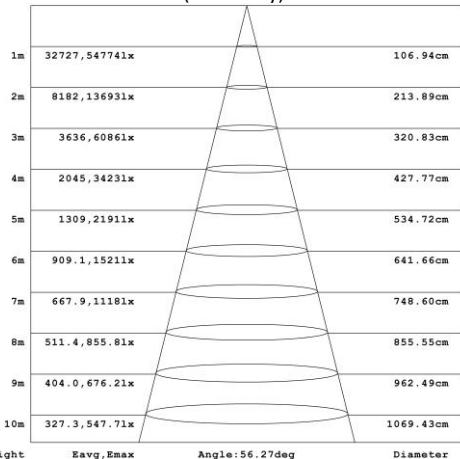

Specification

Model	FLA-SC1000W-RV	FLA-SC1000W-AV
Colour Temperature (1CCT)	5000K	
Lumen (lm)	112,218lm	111,862lm
Efficiency (lm/w)	>112lm/w	
Light Source	LED	
CRI (%)	≥80	
Beam Angle	60°	150x80°
Power Requirement	90~305VAC	
Power Consumption	1000w	
Dimmable	No	
Housing	Diecast aluminium with toughened glass lens	
Lifespan	>50,000 hours	
Operation Temperature	-20°C~+60°C	
Product Dimension	672 x 1120 x 188mm	
Impact Rating	IK08	
Weight	33kg	
Protection Rating	IP66	
Warranty	5 Years	

Specifications are subject to change without notice