



## 10w LED Bunker Light

### Product Features

- 10w
- 3 colours in one: 3000K, 4000K, 5000K (switch select)
- 120° Beam Angle
- Aluminium die cast housing
- Polycarbonate face
- 215 x 135 x 50mm
- IP65 Housing
- IK10 Impact Rating
- Weight: 500g



Options:



Eyelid Cover



Grille Cover

**3 Colour Adjustable**



### Specification Overview



Vandal Resistance  
**IK10**




Model	Power	Power Requirement	Colour Temp	Lumens	Beam Angle	Trim Colour	Dimensions
WL-BH10-3C-B	10w	220~240VAC	3000K/4000K/5000K	900~1000lm	120°	Black	215x135x50mm
WL-BH10-3C-W	10w	220~240VAC	3000K/4000K/5000K	900~1000lm	120°	White	215x135x50mm

# Product Specification



## 10w LED Bunker Light

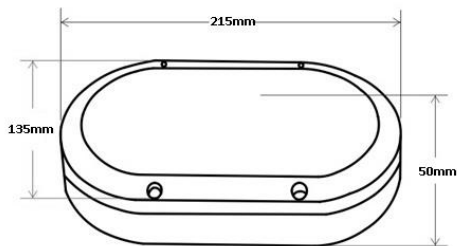


### Options:



**Eyelid Cover**  
 Model: WL-BH10-ELC-B  
 Model: WL-BH10-ELC-W  
 (B) Black (W) White



**Grille Cover**  
 Model: WL-BH10-GC-B  
 Model: WL-BH10-GC-W  
 (B) Black (W) White

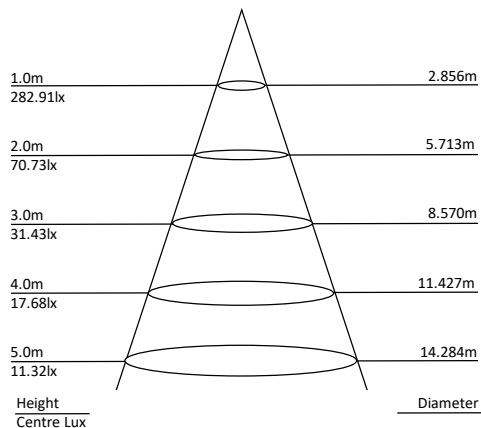

### Specification

Model	WL-BH10-3C-B	WL-BH10-3C-W	
Trim Colour	Black	White	
Colour Temperature (3CCT)	3000K	4000K	5000K
Lumen (lm)	900lm	1000lm	970lm
Efficiency (lm/w)	>90lm/w	>100lm/w	>97lm/w
Light Source	LED		
CRI (%)	≥80		
Beam Angle	120°		
Power Requirement	220~240VAC		
Power Consumption	10w		
Dimmable	No		
Housing	Diecast aluminium with PC diffuser		
Lifespan	>40,000 hours		
Operation Temperature	-20°C~+45°C		
Product Dimension	215 x 135 x 50mm		
Impact Rating	IK10		
Weight	500g		
Protection Rating	IP65		
Warranty	5 Years		

Specifications are subject to change without notice