




Bunker Light – Turtle Safe / Bug Free / Eyewash

Product Features

- 10w / 20w Dual Power Selectable
- 2 colours in one:
Amber (Turtle Friendly/Bug Free*) and Green (Eye wash)
- 120° Beam Angle
- Aluminium die cast housing
- Ø275 x 80mm
- IP65 Housing
- IK10 Impact Rating
- Weight: 1.25kg

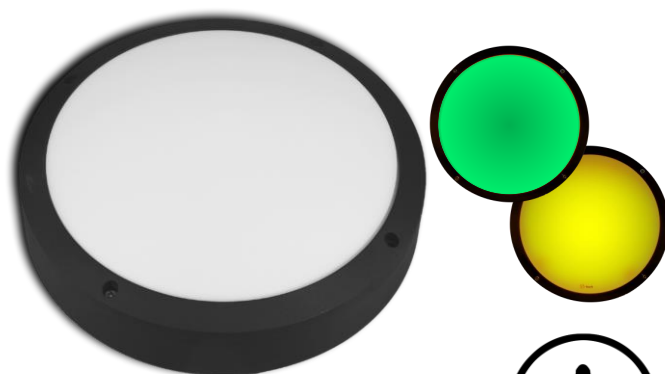

Options:



Standard



Emergency



Microwave Sensor



Dusk-to-dawn Sensor



TURTLE SAFE



BUG FREE



EYEWASH LIGHT



COLOUR SELECT



WATT SELECT



Specification Overview



Vandal Resistance

IK10



N14256

5827


Model	Power	Power Requirement	Colour Temp	Lumens	Beam Angle	Trim Colour	Dimensions
WL-BH20-TLG-B	10/20w	200~240VAC	Amber / Green	2000 ~ 2200lm	120°	Black	Ø275x80mm

WL-BH20-TLG-B-E Emergency Version

Product Specification



Bunker Light - Turtle Safe / Bug Free / Eyewash - Standard

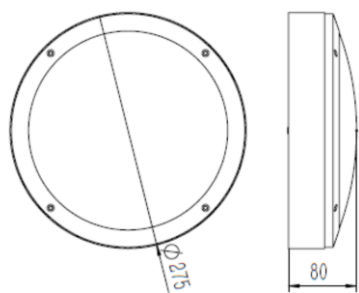

Specification

Model	WL-BH20-TLG-B
Colour Temperature (2CCT)	Amber / Green (selectable)
Lumen (lm) @ 20w	2000lm ~ 2200lm
Efficiency (lm/w)	>100lm/w
Light Source	LED
CRI (%)	≥80
Beam Angle	110°
Power Requirement	200~240VAC
Power Consumption	10w / 20w selectable
Dimmable	No
Housing	Diecast aluminium with PC diffuser
Lifespan	>50,000 hours
Operation Temperature	-20°C~+45°C
Product Dimension	Ø275 x 80mm
Impact Rating	IK10
Weight	1.25kg
Protection Rating	IP65
Warranty	5 Years



TURTLE SAFE



BUG FREE




EYEWASH LIGHT

* Whilst our testing using an amber light source has found it will attract approximately 90% less bugs than alternate light sources, there is still a risk of some bugs being attracted to our bug free lighting products.

Specifications are subject to change without notice


Product Specification

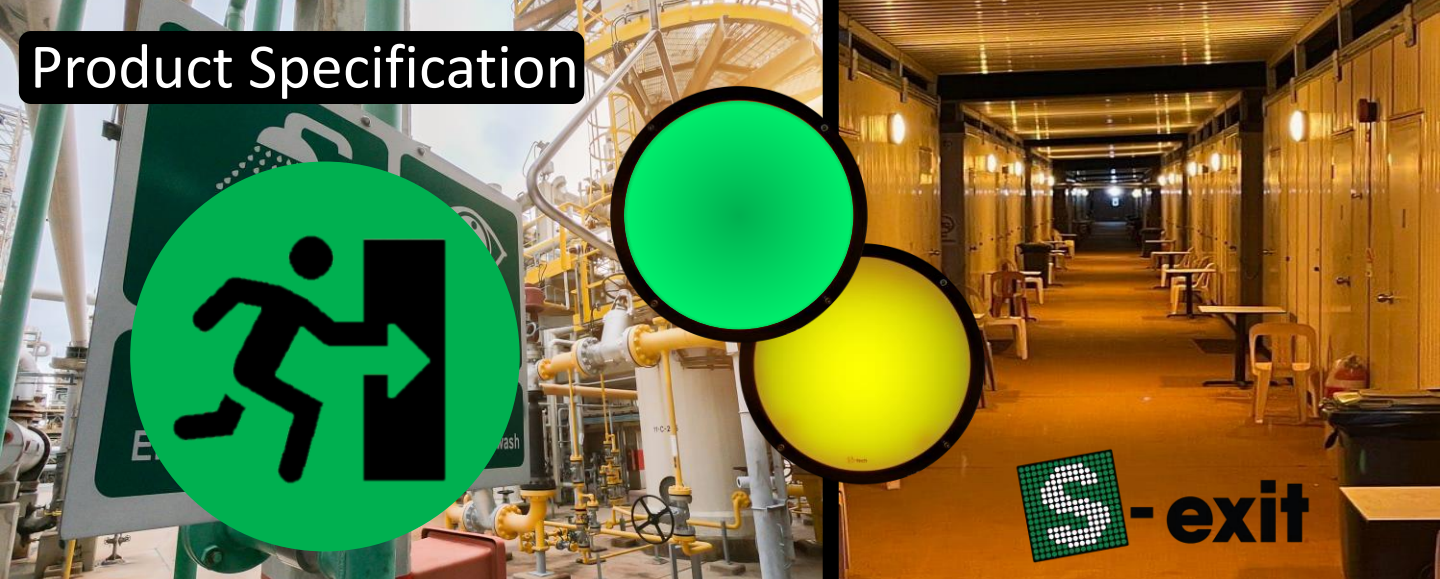

Bunker Light - Turtle Safe / Bug Free / Eyewash - Emergency

Product Features

- Maintained / Non-Maintained Emergency Fitting

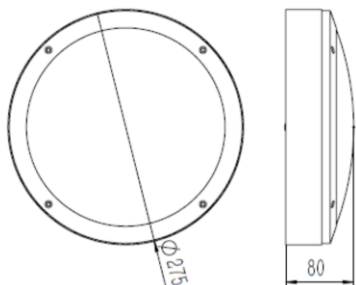

TURTLE SAFE



BUG FREE



EYEWASH LIGHT

* Whilst our testing using an amber light source has found it will attract approximately 90% less bugs than alternate light sources, there is still a risk of some bugs being attracted to our bug free lighting products.

Specification

Model	WL-BH20-TLG-B-E
Colour Temperature (2CCT)	Amber / Green (selectable)
Lumen (lm) @ 20w	2000lm ~ 2200lm
Efficiency (lm/w)	>100lm/w
Light Source	LED
CRI (%)	≥80
Beam Angle	110°
Power Requirement	200~240VAC
Power Consumption	10w / 20w selectable
Emergency Power	2w
Emergency Run-Time	180 minutes
Battery	LifePO4 6.4v 1500mAH
Dimmable	No
Housing	Diecast aluminium with PC diffuser
Lifespan	>50,000 hours
Operation Temperature	-20°C~+45°C
Product Dimension	Ø275 x 80mm
Impact Rating	IK10
Weight	1.6kg
Protection Rating	IP65
Warranty	5 Years

Specifications are subject to change without notice