

Product Specification



LED High Bay
320w ASTRA 3 UFO



Product Features

- 320w, 250w or 210w Options
- 3 colour adjustable (3000K, 4000K, 5000K)
- Quality 0-10V Dimmable Driver
- DALI compatible (with optional converter)
- Full range power input 100~305VAC
- Aluminium die cast housing
- Polycarbonate Lens
- 90° Beam Angle
- Supplied with 2m flex and plug
- Optional Plug and Play Motion Sensor
- Ø360 x 200mm
- IP65 Housing
- IK10 Impact Rating
- Weight: 6.7kg

Options:



Microwave motion sensor



DALI to 0-10V converter



Specification Overview



WATT SELECT
LED HIGHBAY LIGHT




COLOUR SELECT




Model	Power	Input	Colour Temp	Lumens	Beam Angle	Trim Colour	Weight
HB-AS3	210/250/320w	Ø360x200mm	3000K/4000K/5000K	29,747~47,246lm	90°	Black	6.7kg
HB-MMS-ANT54T	Plug-in Microwave Sensor to suit (suitable for heights <12m)						
HB-MMS-ANT64T	Plug-in PIR Sensor to suit (suitable for heights <15m)						
HB-RC100	Remote control for set-up of HB-MMS-ANT54T and HB-MMS-ANT64T						

LED High Bay 320w ASTRA 3 UFO

Model	Trim Colour	Power (selectable)	Lumens	CCT (selectable)	Dimension (Dia x H)	Weight
HB-AS3	Black	210w selection	29,747lm	3000K/4000K/5000K	Ø360 x 200mm	6.7kg
HB-AS3	Black	250w selection	35,654lm	3000K/4000K/5000K	Ø360 x 200mm	6.7kg
HB-AS3	Black	320w selection	47,246lm	3000K/4000K/5000K	Ø360 x 200mm	6.7kg

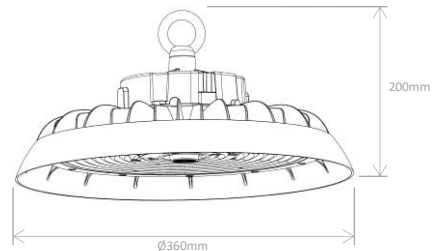Specification				Dimensions
CCT	3000K/4000K/5000K selectable	Housing	Diecast aluminium with Polycarbonate lens cover	
Efficacy	>140lm/w	Lens	Polycarbonate	
CRI (%)	≥80	Housing Colour	Black	
Beam Angle	90°	Lifespan	>50,000 hours	
Power Input	100~305VAC	Operation Temperature	-40 °C to +60°C	
Dimmable	Yes, 0-10V. DALI with optional converter			
Impact Rating	IK10			
Protection Rating	IP65	Warranty	5 Years	

Watt & Colour Select Settings



Default: 320w / 5000K

Options



Plug-In Microwave Motion Sensor

Model: HB-MMS-ANT54T
(Requires remote for setup: HB-RC100)



DALI to 0-10V Converter

Model: HB-SCD010B



Plug-In PIR Motion Sensor

Model: HB-MMS-ANT64T
(Requires remote for setup: HB-RC100)



Programming Remote for Motion Sensors

Model: HB-RC100

Specifications are subject to change without notice