





SECURE WP Series




Product Features

- Vandal Proof Security Batten
- Available in 2FT or 4FT
- 2FT: 28w/32w/36w/40w Power Selectable
4FT: 48w/52w/56w/60w Power Selectable
- 3 colours in one: 3000K, 4000K, 5000K (switch select)
- Flicker Free Driver
- Aluminium base with PC diffuser
- 120° Beam Angle
- IP66, IK10 Housing
- Weight: 1.9kg (2FT), 3.4kg (4FT)

Options:



Model	Watt	Size	CCT	Lumens	Beam Angle	Trim Colour	Weight
WP-SEC2FT-3C	28/32/36/40w	650 x 110 x 97mm	3000-4000-5000K	3220~4800lm	120°	Grey	1.9kg
WP-SEC2FT-EM	2FT Emergency Version						
WP-SEC4FT-3C	48/52/56/60w	1170 x 110 x 97mm	3000-4000-5000K	5520~7200lm	120°	Grey	3.4kg
WP-SEC4FT-EM	4FT Emergency Version						
WP-SECPWR-28	Driver Pack 28w/32w/36w/40w (requires installation into fitting)						

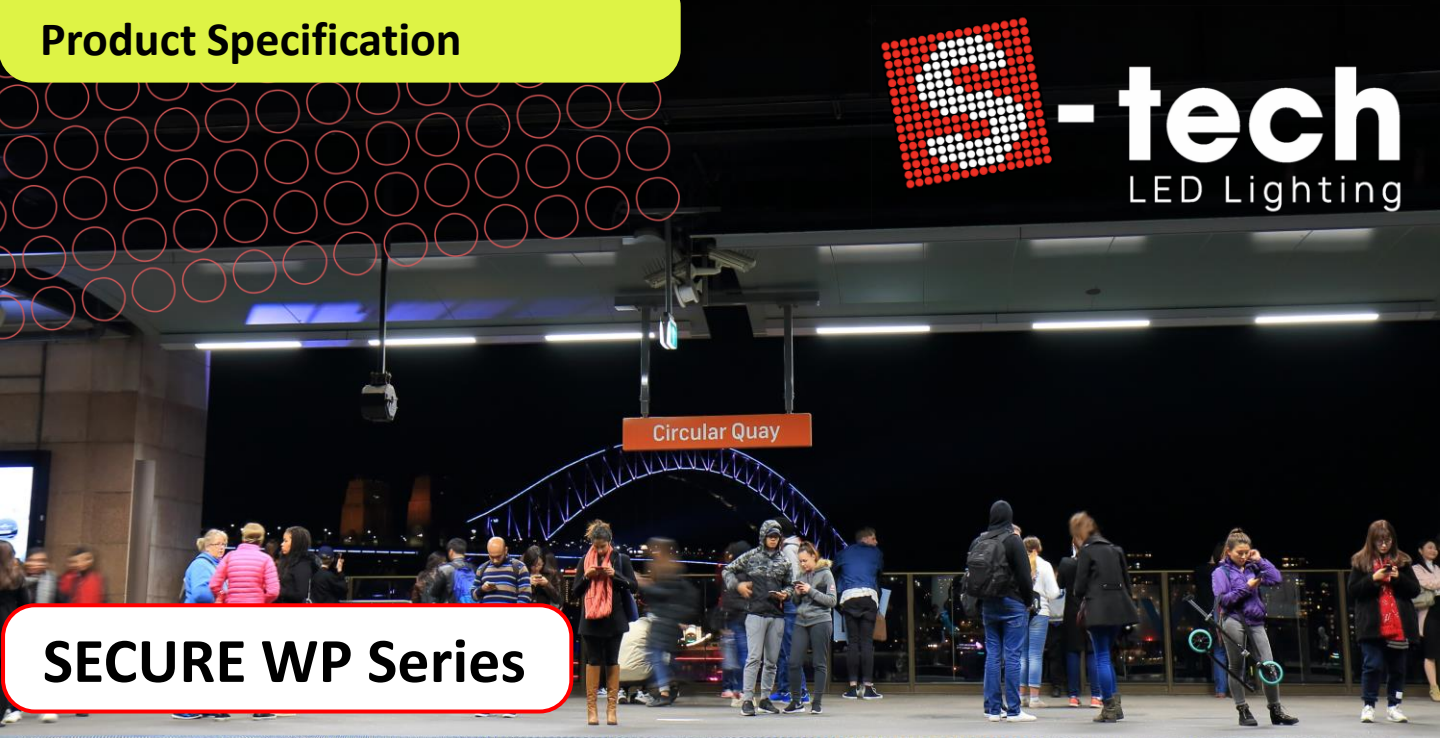

SECURE WP Series

Specification

Model	WP-SEC2FT-3C	WP-SEC4FT-3C
Colour Temperature (3CCT)	3000K / 4000K / 5000K	
Lumen (lm)	4600~4800lm (40w)	6900~7200lm (60w)
Efficiency (lm/w)	>115lm/w	
Light Source	LED	
CRI (%)	≥80	
Beam Angle	120°	
Power Requirement	200~240VAC	
Power Consumption (selectable)	28w/32w/36w/40w	48w/52w/56w/60w
Dimmable	No	
Housing	Aluminium Base with PC Diffuser	
Housing Colour	Grey	
Lifespan	>60,000 hours	
Operation Temperature	-20°C~+50°C	
Product Dimension	650 x 110 x 97mm	1170 x 110 x 97mm
Impact Rating	IK10	
Weight	1.9kg	3.4kg
Protection Rating	IP66	
Warranty	5 Years	

Specifications are subject to change without notice