

Product Specification



Round Street Lantern 60w 3CCT




Product Features

- 60w
- 3 Colour Adjustable (3000K/4000K/5000K)
- Black Housing
- Fits both 60mm and 76mm spigot size (adaptor included)
- Aluminium die cast housing
- 120° Beam Angle
- IP65 Housing
- IK08 Impact Rating
- Weight: 5.8kg

Options:



Mounting Poles



Spigot Adaptors


Specification Overview



Model	Power	Input	Colour Temp	Lumens	Beam Angle	Trim Colour	Dimensions	Spigot Size
PSL-43060-3C-R	60w	100~277VAC	3000K/4000K/5000K	6,046lm (4000K)	120°	Black	Ø430 X 526mm	Ø60mm or Ø76mm

Round Street Lantern 60w 3CCT

Model	Power	Lumens	CCT	Spigot Size	Dimension	Weight
PSL-43060-3C-R	60w	5,468lm 6,046lm 6,035lm	3000K 4000K 5000K	Ø60 and Ø76mm (adaptor included)	Ø430 x 526mm	5.8kg

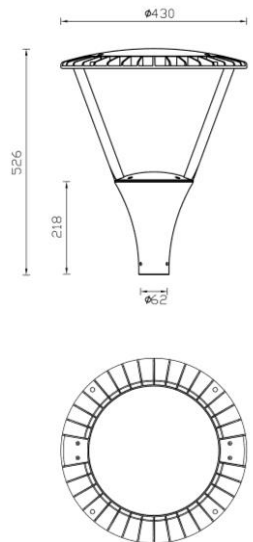Specification				Dimensions	
CCT	3000K/4000K/5000K (selectable)	Housing	Aluminium		
Efficacy	>94lm/w	Lens	Toughened Glass		
CRI (%)	≥80	Housing Colour	Black		
Beam Angle	120°	Lifespan	>40,000 hours		
Power Input	100~277VAC	Operation Temperature	-20 °C to +45°C		
Dimmable	No				
Impact Rating	IK08				
Protection Rating	IP65	Warranty	5 Years		

Options



Mounting Poles
Direct Bury and Base
Plate options
available



SLM-PTA-10160-G
Pole Top Adaptor
Ø85~93mm > 60mm
Galvanised Finish
SLM-PTA-10160-PC (black)